



Doosan Infracore
Construction Equipment



Bobcat®

Bobcat S590 | Skid-Steer Loader

The Bobcat® S590 skid-steer loader features a superior design that outperforms other brands while maximizing your uptime and delivering unmatched comfort. The Bobcat S590 uses the machine's design and balance to deliver more usable horsepower. Bobcat Skid Steer Loaders are built with the right balance between engine and pump, plus a weight distribution that delivers powerful breakout forces and faster cycle times. To work quicker, lift more and outperform the competition, Bobcat S590 Compact Skid-steer Loader is the ideal solution to your requirement.




Specifications and Features S590 Skid-Steer Loader



Loader		S590
Loader Series		M-Series
Rated Operating Capacity (ROC)		2100 lb. (952 kg)
Tipping Load		4200 lb. (1905 kg)
Height to Hinge Pin		119.0 in. (3023 mm)
Lift Arm Path		Vertical
Size and Speed		
Operating Weight		6735 lb. (3054 kg)
Bucket Width		74 in. (1880 mm)
Cab Height		77.8 in. (1972 mm)
Travel Speed-Low Range		7.4 mph (11.8 km/hr.)
Travel Speed-High Range (optional 2-speed)		11.0 mph (17.3 km/hr.)
Engine		
Horsepower		66 hp
Type		Turbo Diesel
Fuel Tank Capacity		24.75 gal. (93.7 L)
Horsepower Management		Included with SJC Option
Uptime Protection		
Axle Grease		never
Axle Seal Protection		Std
Bobcat SmartFAN™		Std
Dual Path Cooling System		Std
Machine Shutdown Protection		Std
Required Chain Adjustment		never
Tires		
Bobcat Heavy Duty		Opt
Bobcat Super Float		Std
Control Options		
Bobcat Standard (foot pedals/steering levers)		Std
Advance Control System (ACS)		Opt
Selectable Joystick Control (SJC)		Opt
Radio Remote Control (SJC Required)		Opt
Machine Features		
Air Ride Seat		Opt
Back-up Alarm & Horn		Std
Bobcat Interlock Control System (BICS)™		Std
Cab with Heat		Opt
Cab with Heat & Air Conditioning		Opt
Deluxe Instrumentation (includes Keyless Start)		Opt
Hydraulic Bucket Positioning		Opt
Mechanical Suspension Seat		Opt
Front and Rear Work Lights		Std
Radio		Opt
Ride Control		Opt
ROPS/FOPS Approved Cab Structure		Std
Sound Reduction Package		Opt
2-Speed		Opt

Dimensions

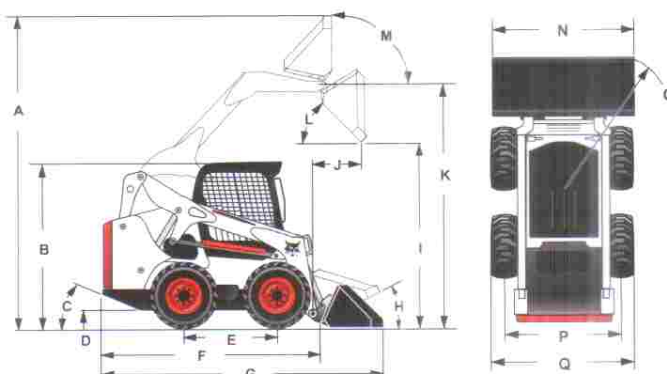

Standard Bucket Width - 74 inch

Dimensions	S590
A	158.1 in. (4016 mm)
B	77.8 in. (1972 mm)
C	24.2°
D	7.3 in. (185 mm)
E	42.6 in. (1082 mm)
F	104.6 in. (2657 mm)
G	136.7 in. (3472 mm)
H	30°
I	83.9 in. (2133 mm)
J	35.2 in. (894 mm)
K	119 in. (3023 mm)
L	42°
M	97°
N	74.0 in. (1880 mm)
O	84.2 in. (2138 mm)
P	55.5 in. (1410 mm)
Q	65.2 in. (1656 mm)



Doosan Infracore
Construction Equipment

Doosan Infracore India Pvt Ltd

3rd Floor, TNPL Building, 67, Mount Road, Guindy,
Chennai - 600032, Tamilnadu, India

Phone: +91 44 42223900; Fax: +91 44 42223905

Email: marketingindia@doosan.com; Toll Free: 1800 200 2299